


SLATWALL QUOTE SHEET

Name _____
 Company _____
 Address _____
 City/State _____
 Phone _____
 Email _____

QUANTITY: _____
 SIZE: _____
 (Standard Size: 4' x 8')

SLATWALL ORIENTATION

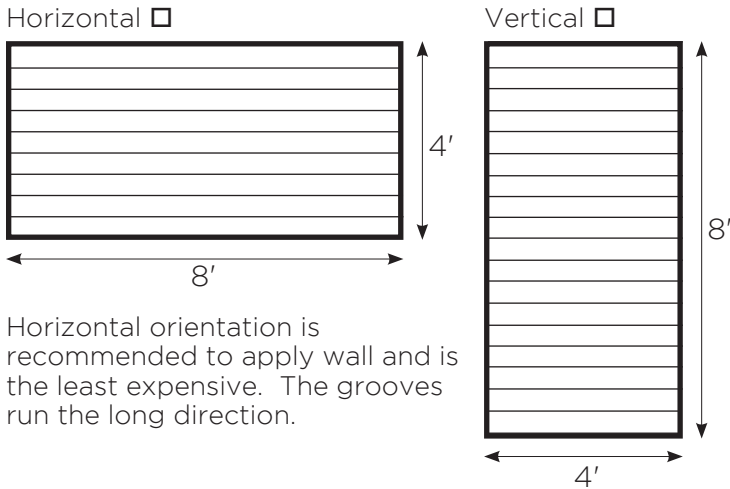


Horizontal orientation is recommended to apply wall and is the least expensive. The grooves run the long direction.

Vertical orientation is used to place slatwall in narrower areas and used often for making store fixtures. The grooves run in the short direction. (Images below not to scale)

SLATWALL ON-CENTER GROOVE SPACING

3" O.C. is our standard groove spacing and will be most economical however multiple space options are available (3" from the center of one groove to the center of the next groove)

- 2" O.C. 3" O.C. 4" O.C.
 6" O.C. 8" O.C. 12" O.C.



CORE MATERIAL - 3/4"

- MDF - Medium Density Fiberboard
 Valchromat (Colored MDF)

SLATWALL SURFACE FINISH

- Unfinished (Paint Grade) - Raw MDF
 Painted _____
 Melamine Foil _____
 HPL _____
 TFL _____
 Wood Veneer _____
 Other _____

EDGE FINISH

- Half Lap Both Ends

 2 half grooves For stacking on both ends
- Half Lap One End

 One half groove square and one square end for stacking
- Flat on Both Ends

 Square end on both top and bottom

SLATWALL GROOVE INSERTS

- No Insert - Considered light duty
 Mill Aluminum Insert
 Plastic Insert - No added strength
 PVC Accent Strip - No added strength
 Other _____

CUSTOM OPTIONS

- Slatwall panels routed to custom shapes
- Custom margins and spaces
- Holes drilled in slatwall panels to specifications
- Edge finishing including edge banding

NOTE ANY CUSTOM REQUIREMENTS

1030 Devere Drive
 Alpena, MI 49707
 800.433.7142
 www.panel.com

